



Serie Desktop

Terminale POS professionale
ad alte prestazioni



Easy Access

Accesso facilitato a interfacce e
tasto ON/OFF




Cable Cover

Cover di protezione cavi



IP 65

Protezione IP65 per liquidi e polvere
(lato frontale).




Quick HDD Access

Accesso facile e immediato per SSD



Slim & Elegant

46 mm di spessore. (12
mm per la cornice
anteriore)




Die-casting Housing

Il design dell'alloggiamento in
alluminio pressofuso consente
la dissipazione del calore.



VESA Mount

Predisposizione VESA Standard
75x75,100x100 per montaggio
a parete o pole-mount





Easy Service

Facilità di intervento: solo 2 viti
per accedere a mainboard, LCD
ecc.


Modello A1-A2

bestpos

Dimension

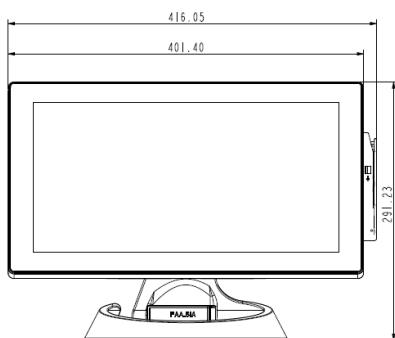

I/O Interface

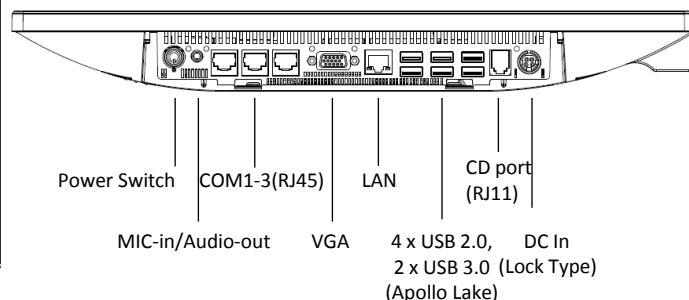

Specifiche Tecniche

Model		Serie Desktop (A1, A2)
CPU Support		Intel Celeron J1900 2.0 Ghz– Modello A1 Pentium N4200 1.1 GHz >> fino a 2.5 Ghz – Modello A2
System Memory		DDR3L, SO-DIMM x 1, 4GB (Max. 8GB)
Storage	HDD	1 x 2.5" HDD (Optional)
	SSD	1 x 2.5" SSD
LCD	Size	15.1" TFT LED LCD Panel - Modello A1 15.6" TFT LED LCD Panel - Modello A2
	Brightness	220cd/m ² (Typ.) / 300cd/m ² (Typ.)
	Resolution	1024 x 768 / 1366 x 768 / 1920 x 1080
Touch Screen		True-Flat Projected Capacitive Touch
Tilt Angle		0 ~ 120 degree
External I/O Port	Rear	4 x USB 2.0 Ports, 2 x USB 3.0 Ports
		3 x Serial port (RJ45); (COM1~3: 0/5/12V by BIOS)
		1 x VGA (Power enable by BIOS; +12V)
		1 x Cash Drawer Port (RJ11; +12V/24V)
		1 x LAN (10/100/1000)
		1 x MIC-In/Speaker-out (Combo Jack)
		1 x DC In, (Lock type)
		1 x Power Switch
Speaker		2 x 2W speaker (Optional)
Power		External power adapter, 60W/12V (Lock type)
EMC Safety		CE, FCC Class A
Environment	Operating Temperature	0°C ~ 35°C
	Storage Temperature	-20°C ~ 60°C
	Operating Humidity	20% - 85% RH non condensing
	Storage Humidity	20% - 85% RH non condensing
OS Support		Windows® 10 IoT
Dimension (W x D x H)		401.4 x 234.83 x 291.23 mm (With Stand)
Weight (N.W./G.W.)		6 kgs(N.W.)/7 kgs(G.W.)
Wall Mount		VESA 100 x 100mm
	MSR (USB)	MSR / MSR + Finger Print (Combo) / MSR + i-Button (Combo) / MSR + RFID (Combo) / MSR + EMV + RFID (Combo)
	Customer display (USB)	Flush mount VFD display, 2x20 characters
	2nd Display	9.7" (1024 x 768)